



Global Leader in
Waterworks Tools Since 1957

MODEL 38300

HYDROSTATIC TEST PUMP

SAME POWERFUL PUMP, NEW LOWER PRICE

Compact, lightweight for portability, yet powerful and rugged for the professional




**NEW
LOWER
PRICE**

**NEW
LOWER
PRICE**

MODEL 38300

HYDROSTATIC TEST PUMP

Certify Fire Sprinkler Lines, Conduct Commercial Plumbing, and perform **Industrial Testing** with ease. Our solution is designed to excel in these applications—compact, lightweight for effortless portability, yet robust and powerful for the demands of professionals like you. Equipped with a built-in adjustable pressure regulator, you have complete control at your fingertips, ensuring precise and accurate results every time.

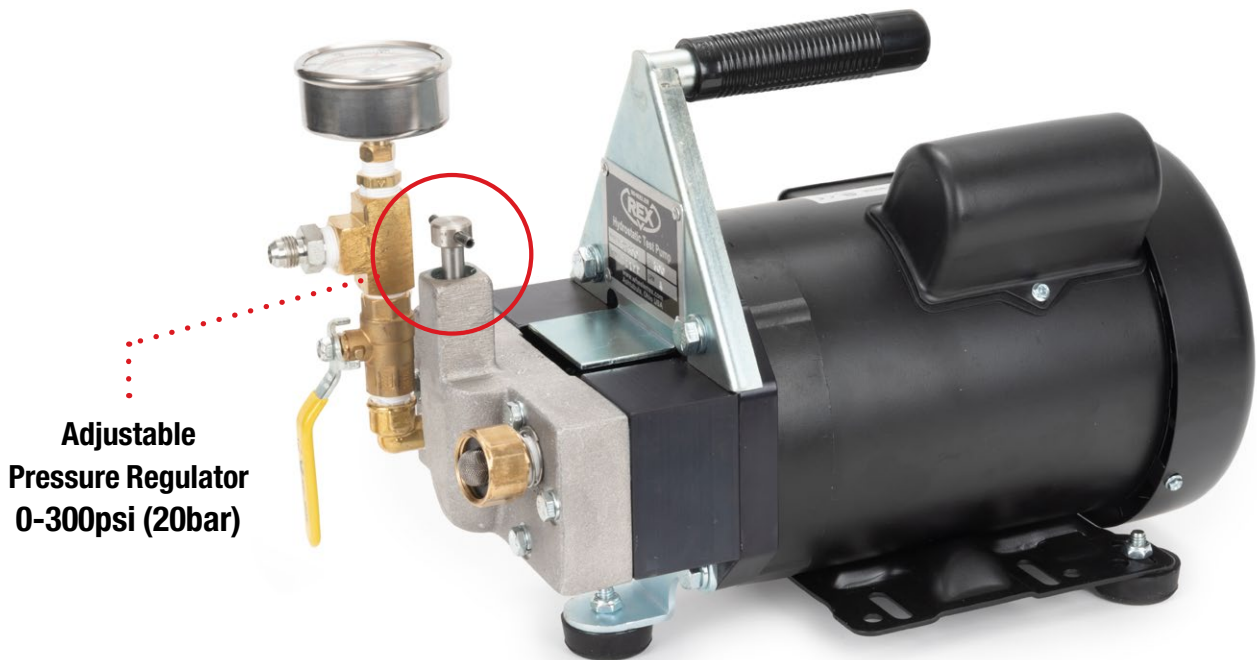

**Adjustable
Pressure Regulator
0-300psi (20bar)**

SPECIFICATIONS

Dimension	14" (356mm)L x 10" (254mm)W x 12" (305mm)H
Weight	45lbs/20kg
Pump Style	Twin piston, positive displacement Capacity 4gpm/15lpm, @60hz; 3.4gpm/12lpm @50hz Pressure 0-300psi (20bar)
Motor	1/2hp 115/230V, 1725rpm @60hz, 1450rpm @50hz
Lubrication	Chassis Grease
Control	Adjustable pressure relief valve
Gauge	Glycerin filled, 0-600psi (40bar)
Inlet Connection	3/4" Female garden hose
Outlet Connection	9/16-18 JICF Male
Discharge Hose	1/4" NPT Male x 10' (3m), 3000psi (207bar)
Hose Ends	9/16-18 JICF Female swivel x 1/4" Male NPT



TOLL FREE

1.800.321.7950 | WHEELERREX.COM

Rex International USA, Inc.
3744 Jefferson Road
Ashtabula, OH, USA 44004